

Xinger III

**Hybrid Coupler
3dB**



Description:

The X3C03A1-03S is a low profile, high performance 3dB hybrid quadrature (90 degree) coupler in a new easy to use, manufacturing friendly surface mount package. It is designed particularly for LTE and 5G wireless communication frequency bands. The X3C03A1-03S can be used for signal splitting or combining in balanced amplifiers and Doherty power amplifiers, where low insertion loss and tight amplitude and phase balance control are required.

Parts have been subjected to rigorous qualification testing and they are manufactured using materials with coefficients of thermal expansion (CTE) compatible with common substrates such as FR4, RF-35, RO4350 and polyimide. Produced with 6 of 6 RoHS compliant tin immersion finish.

Detailed Electrical Specifications:


Features:

- 225-400 MHz
- LTE and 5G
- Very Low Loss
- Tight Amplitude Balance
- Tight Phase Balance
- High Isolation
- High Power
- Production Friendly
- Tape and Reel
- Lead Free

| Frequency MHz | Isolation dB Min | Insertion Loss dB Max | VSWR Max : 1 |
|--------------------------------|---------------------|------------------------------------|--------------------------|
| 225-400 | 20 | 0.35 | 1.22 |
| Amplitude Balance dB Max | Phase Degrees | Power Avg.CW Watts at 115° C | Operating Temp. °C |
| ±0.50 | 90±3.0 | 100 | -55 to +150 |


*Specification based on performance of unit properly installed on TTM Test Board with small signal applied. **Specifications are subject to change without notice. Refer to parameter definitions for details

Mechanical Outline:

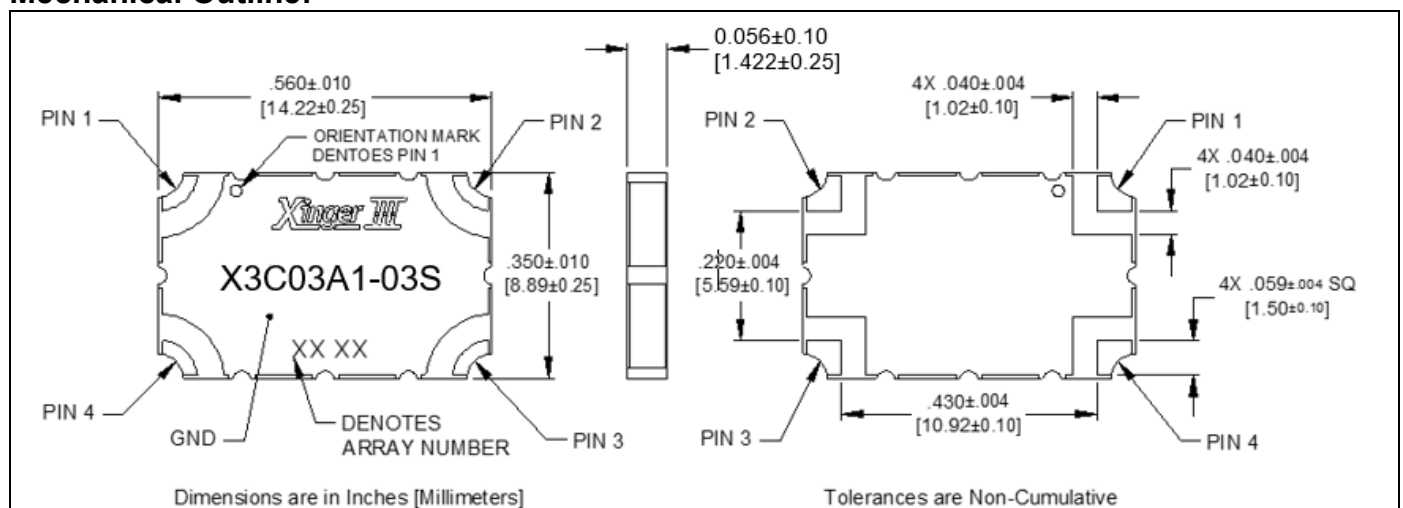

Hybrid Coupler Pin Configuration

The X3C03A1-03S has an orientation marker to denote Pin 1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

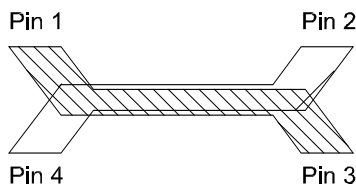


| Configuration | Pin 1 | Pin 2 | Pin 3 | Pin 4 |
|------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Splitter | Input | Isolated | $-3\text{dB} < \Theta < -90$ | $3\text{dB} < \Theta$ |
| Splitter | Isolated | Input | $-3\text{dB} < \Theta$ | $-3\text{dB} < \Theta < -90$ |
| Splitter | $-3\text{dB} < \Theta < -90$ | $3\text{dB} < \Theta$ | Input | Isolated |
| Splitter | $3\text{dB} < \Theta$ | $-3\text{dB} < \Theta < -90$ | Isolated | Input |
| | | | | |
| *Combiner | $A < \Theta < -90$ | $A < \Theta$ | Isolated | Output |
| *Combiner | $A < \Theta$ | $A < \Theta < -90$ | Output | Isolated |
| *Combiner | Isolated | Output | $A < \Theta < -90$ | $A < \Theta$ |
| *Combiner | Output | Isolated | $A < \Theta$ | $A < \Theta < -90$ |



*Note: "A" is the amplitude of the applied signals. When two quadrature signals with equal amplitudes are applied to the coupler as described in the table, they will combine at the output port. If the amplitudes are not equal, some of the applied energy will be directed to the isolated port.

Peak Power Handling

High-Pot testing of these couplers during the qualification procedure resulted in a minimum breakdown voltage of 2.32Kv (minimum recorded value). This voltage level corresponds to a breakdown resistance capable of handling at least 12dB peaks over average power levels, for very short durations. The breakdown location consistently occurred across the air interface at the coupler contact pads (see illustration below). The breakdown levels at these points will be affected by any contamination in the gap area around these pads. These areas must be kept clean for optimum performance. It is recommended that the user test for voltage breakdown under the maximum operating conditions and over worst case modulation induced power peaking. This evaluation should also include extreme environmental conditions (such as high humidity).

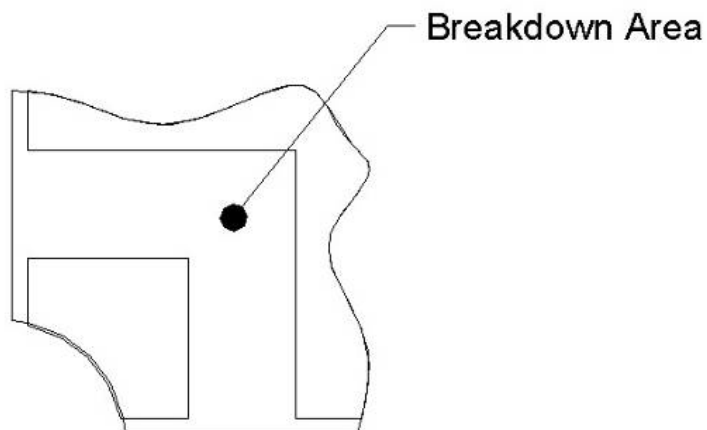

Insertion Loss and Power Derating Curves

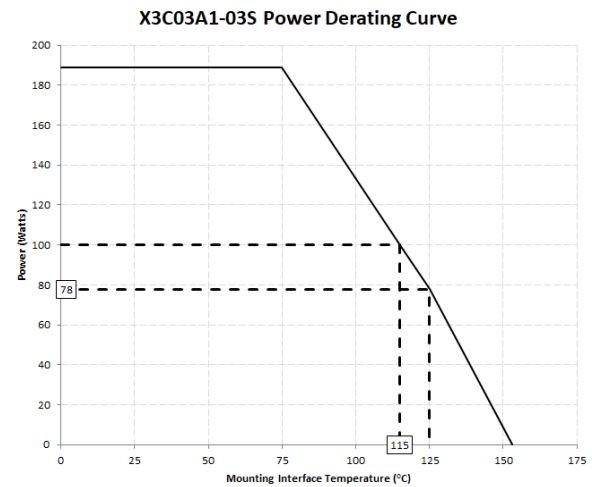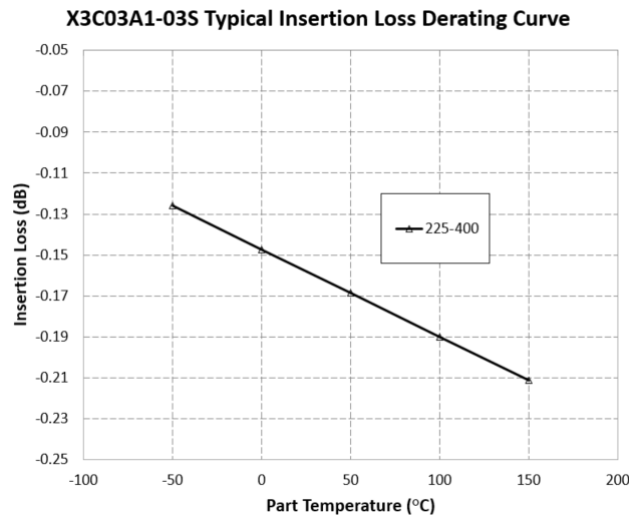

Insertion Loss Derating:

The insertion loss, at a given frequency, of a group of couplers is measured at 25°C and then averaged. The measurements are performed under small signal conditions (i.e. using a Vector Network Analyzer). The process is repeated at -55°C, 95°C, and 150°C. A best-fit line for the measured data is computed and then plotted from -55°C to 150°C.





Power Derating:

The power handling and corresponding power derating plots are a function of the thermal resistance, mounting surface temperature (base plate temperature), maximum continuous operating temperature of the coupler, and the thermal insertion loss. The thermal insertion loss is defined in the Power Handling section of the data sheet.





As the mounting interface temperature approaches the maximum continuous operating temperature, the power handling decreases to zero.

If mounting temperature is greater than 115°C, Xinger coupler will perform reliably as long as the input power is derated to the curve above.

Typical Performance (-55°C , 25°C, 95°C, 150°C)

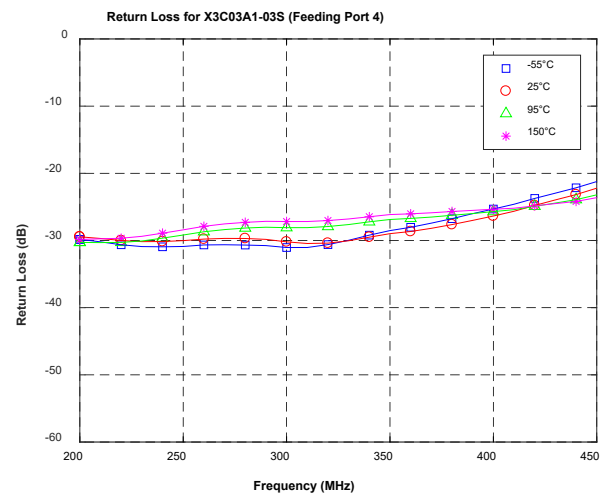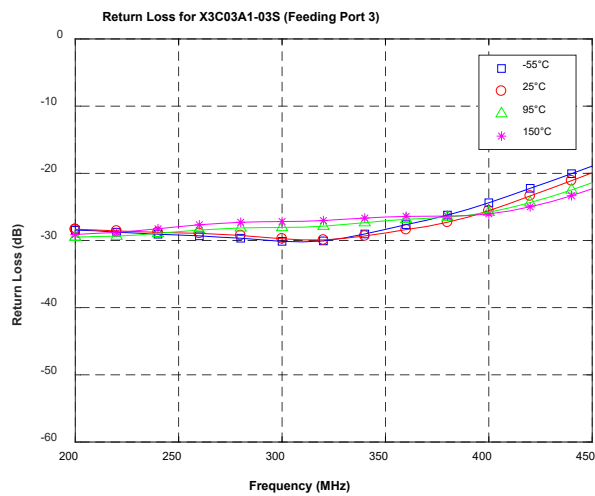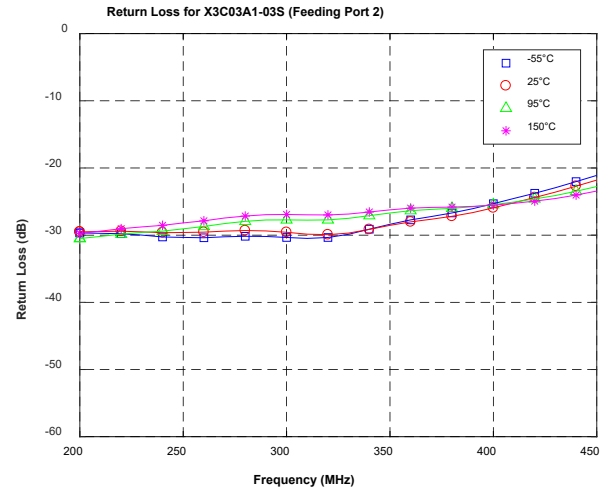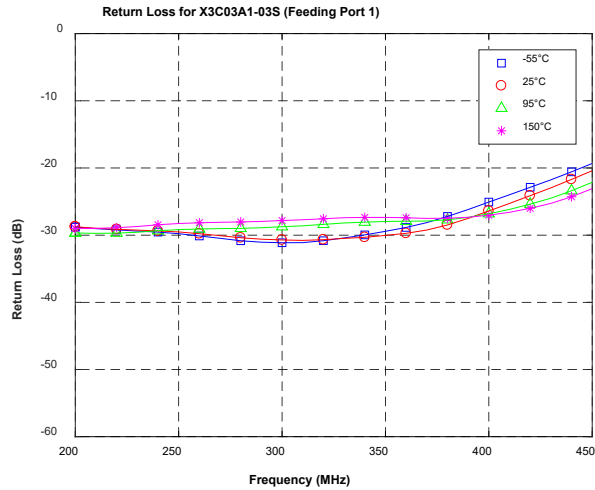

Typical Performance (-55°C , 25°C, 95°C, 150°C)

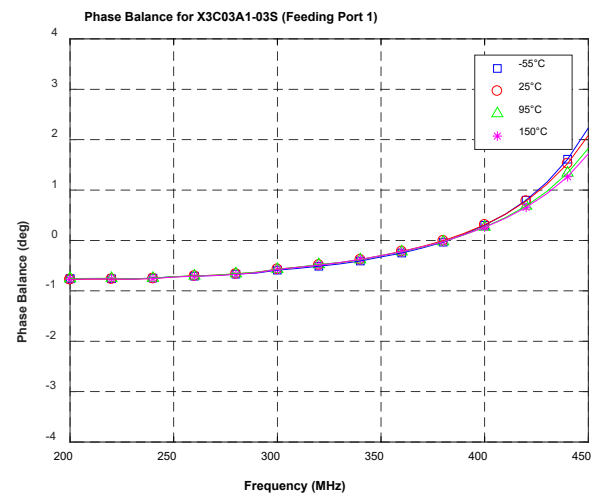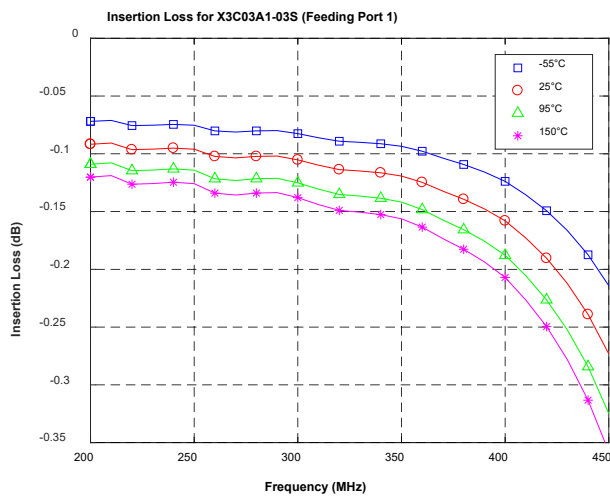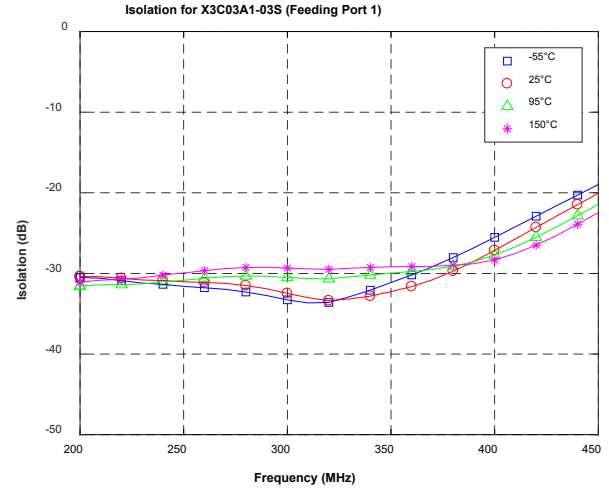
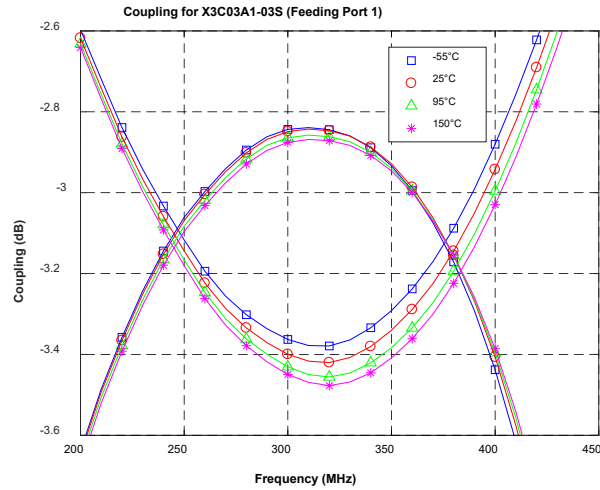


Definition of Measured Specifications

| Parameter | Definition | Mathematical Representation |
|--|--|--|
| VSWR (Voltage Standing Wave Ratio) | The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal. | $VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave |
| Return Loss | The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR. | $Return\ Loss(dB) = 20\log \frac{VSWR + 1}{VSWR - 1}$ |
| Insertion Loss | The input power divided by the sum of the power at the two output ports. | $Insertion\ Loss(dB) = 10\log \frac{P_{in}}{P_{cpl} + P_{direct}}$ |
| Isolation | The input power divided by the power at the isolated port. | $Isolation(dB) = 10\log \frac{P_{in}}{P_{iso}}$ |
| Phase Balance | The difference in phase angle between the two output ports. | Phase at coupled port – Phase at direct port |
| Amplitude Balance | The power at each output divided by the average power of the two outputs. | $10\log \frac{P_{cpl}}{(P_{cpl} + P_{direct})/2} \text{ and } 10\log \frac{P_{direct}}{(P_{cpl} + P_{direct})/2}$ |

Packaging and Ordering Information

Parts are available in a reel. Packaging follows EIA 481-D for reels. Parts are oriented in tape and reel as shown below. Minimum order quantities are 2000 per reel. See Model Numbers below for further ordering information.

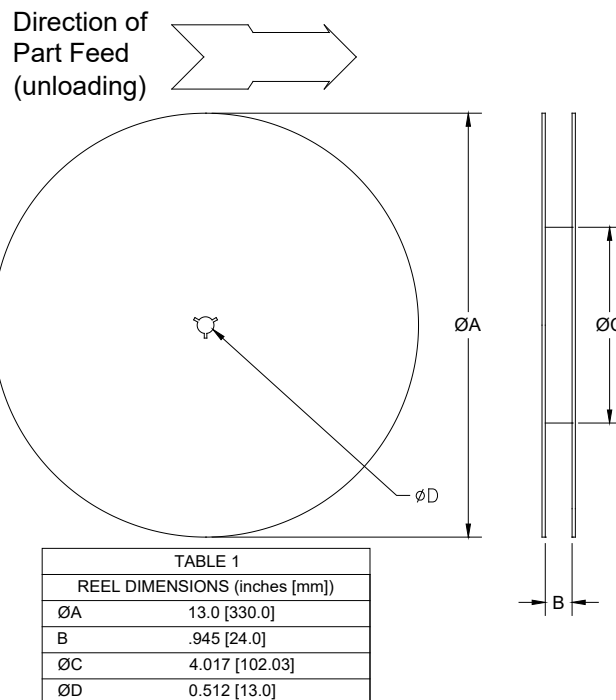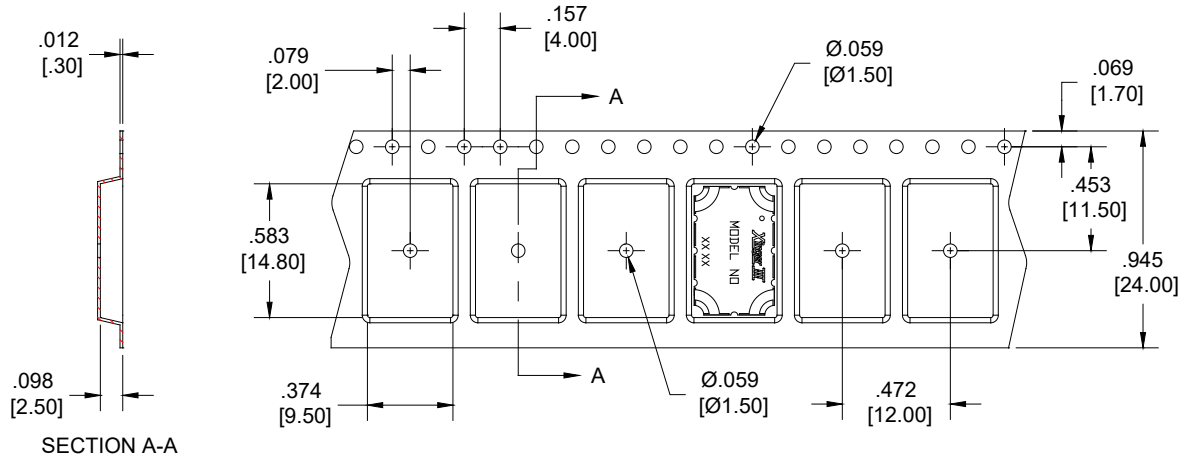

Contact us:
rf&s_support@ttm.com