

3A412 Rev D

Balun Transformers 50Ω to 12.5Ω Balanced



Description:


The 3A412 is a low profile balanced to unbalanced transformer designed for push-pull amplifiers in an easy to use surface mount package for AMPS and GSM. These compact Xinger® surface mount baluns are ideal for high volume manufacturing and are more reliable and repeatable than traditional baluns. The 3A412 has an unbalanced port impedance of 50Ω and balanced port impedances of 12.5Ω to ground with a 25Ω balance between outputs. This eases the matching of the push-pull amplifier's power transistors, which have low impedance levels. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The Xinger® balun is a result of years of research and development culminating with a solution so unique, a patent is pending on the design approach. The 3A412 is available on tape and reel for pick and place high volume manufacturing.

Electrical Specifications***

<u>Features:</u> • 800 – 1000 MHz • 180° Transformer	Frequency	Unbalanced Port Impedance	Balanced Port Impedance*	Return Loss	Insertion Loss
• 50 Ohm to 2 x 12.5+j Ohm	MHz	Ohms	Ohms	dB min	dB max
Low Insertion Loss	800-1000	50	12.5+j	15	0.48
High Power	869-894	50	12.5+j	15	0.35
Even Order SuppressionInput to Output DC Isolation	925-960	50	12.5+j	15	0.40
Surface MountableTape & ReelConvenient Package	Amplitude Balance	Phase Balance	Power Handling	Operating Temp.	
	dB max	Degrees max	Watts	°C	
	0.40	180± 5.0	250	-55 to +85	
	0.40	180± 5.0	250	-55 to +85	
	0.40	180± 5.0	250	-55 to +85	

***Specification based on performance of unit properly installed on microstrip printed circuit boards with 50 Ω nominal impedance. Specifications subject to change without notice. **Insertion Loss excludes reflected power. * 12.5 Ω reference to ground

Outline Drawing:

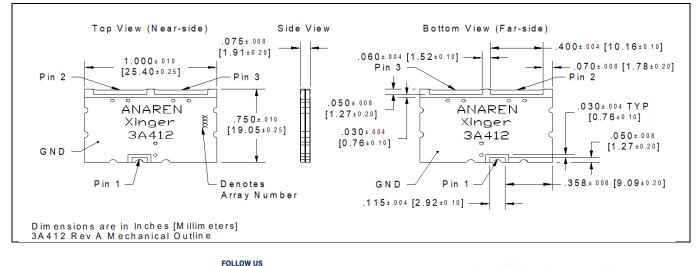


WWW.TTM.COM

f in the Image of the first of the first state of t

Inspiring Innovation



Typical Performance 700 MHz to 1100 MHz

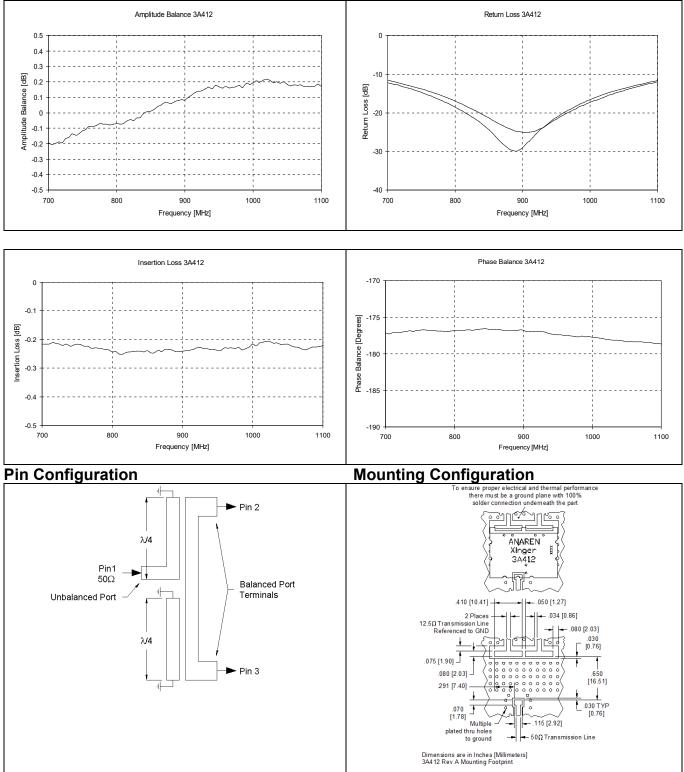

Contact us: rf&s_support@ttm.com

WWW.TTM.COM

FOLLOW US f in the provided and the pro

Inspiring Innovation