



Ultra Low Profile 0404 Balun 50Ω to 100Ω Balanced




Description:

The BD2327N50100AHF is a low cost, low profile sub-miniature unbalanced to balanced transformer designed for differential inputs and output locations on modern chipsets in an easy to use surface mount package. The BD2327N50100AHF is ideal for high volume manufacturing and delivers higher performance than traditional ceramic baluns. The BD2327N50100AHF has an unbalanced port impedance of 50Ω and a 100Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern integrated chipsets. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD2327N50100AHF is available on tape and reel for pick and place high volume manufacturing.


Detailed Electrical Specifications:												
<u>!</u>	Features:	Parameter	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Unit
	2100 – 3800 MHz	Frequency	2300		2700	2700		3800	2100		3100	MHz
	0.5 mm Height Profile	Unbalanced Port Impedance		50			50			50		Ω
	50 Ohm to 2 x 50 Ohm	Balanced Port Impedance		100			100			100		Ω
	Low Insertion Loss	•	47			45			15	20		
	WiMax	Return Loss	17	24		15	22		.0	0.6	0.8	dB
	802.11 b+g	Insertion Loss*		0.6	8.0		0.6	8.0				dB
•		Amplitude Balance		0.4	1.0		0.4	1.0		0.7	1.1	dB
	Bluetooth	Phase Balance		1	7		1	5		1.4	7	Degrees
	Zigbee	CMRR		32			28			27		dB
	Surface Mountable	Power Handling @85C			1.0			1.0			1.0	Watts
	Tape & Reel	Power Handling @105C			0.6			0.6			0.6	Watts
	RoHS Compliant	ů ů										°C
•	Halogen Free	Operating Temperature	-55		+140	-55		+140	-55		+140	-0


Outline Drawing:

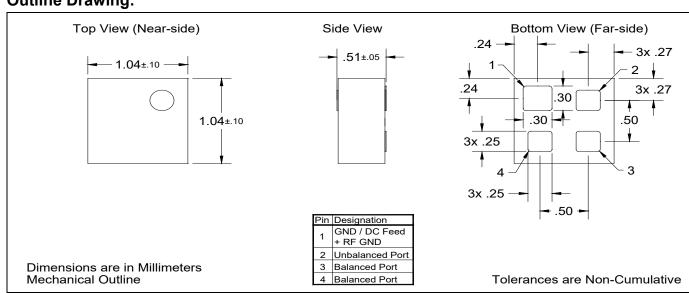






Typical Performance: 2200 MHz to 4000 MHz




















Wide Band Performance: 10 MHz to 8010 MHz







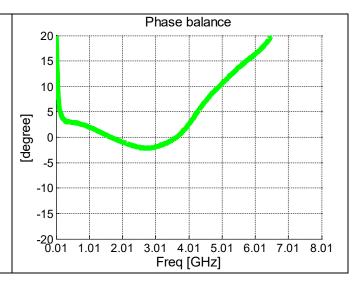








Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

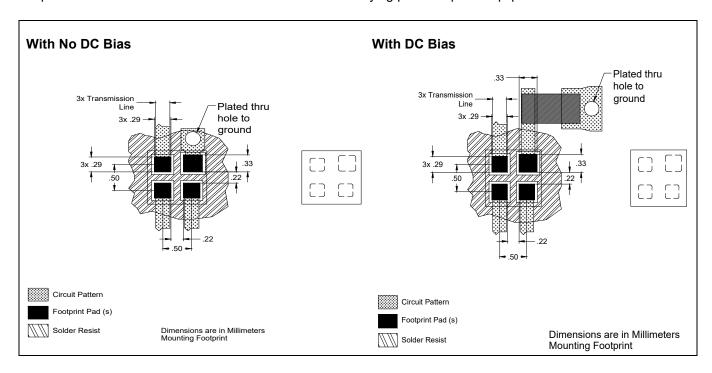






Packaging and Ordering Information:

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

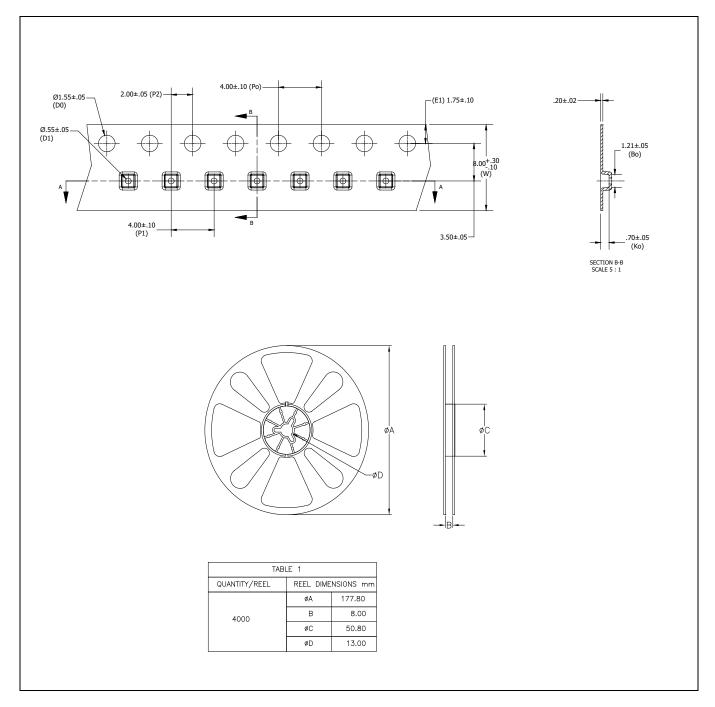

Contact us:

rf&s support@ttm.com

