


Surface Mount Termination 200 Watts, 50Ω



Features:

- RoHS Compliant
- 200 Watts
- 2.5 – 2.7 GHz
- AlN Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

Description:

The C200N50Z4B is high performance Aluminum Nitride (AlN) surface mount termination intended as a cost competitive alternative to Beryllium Oxide (BeO). The termination is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for terminating high power 90 degree couplers and for use in microstrip circuits. The termination is also RoHS compliant!

General Specifications:


Resistive Element	Thick film
Substrate	AlN Ceramic
Terminal Finish	Matte Tin over Nickel Barrier
Operating Temperature	-50 to +150°C (see de rating chart)

Electrical Specifications:


Power:	200 Watts
Frequency Range:	2.5 - 2.7GHz
Return Loss	>20 dB 2.5 - 2.7 GHz

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**


Outline Drawing:

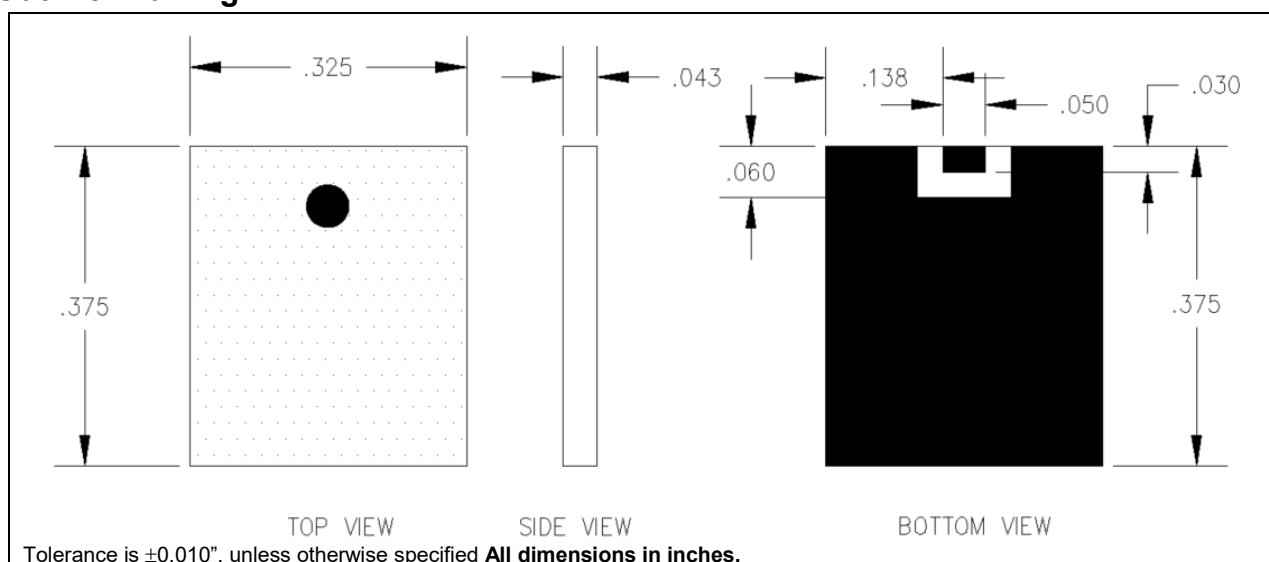


Typical Performance:

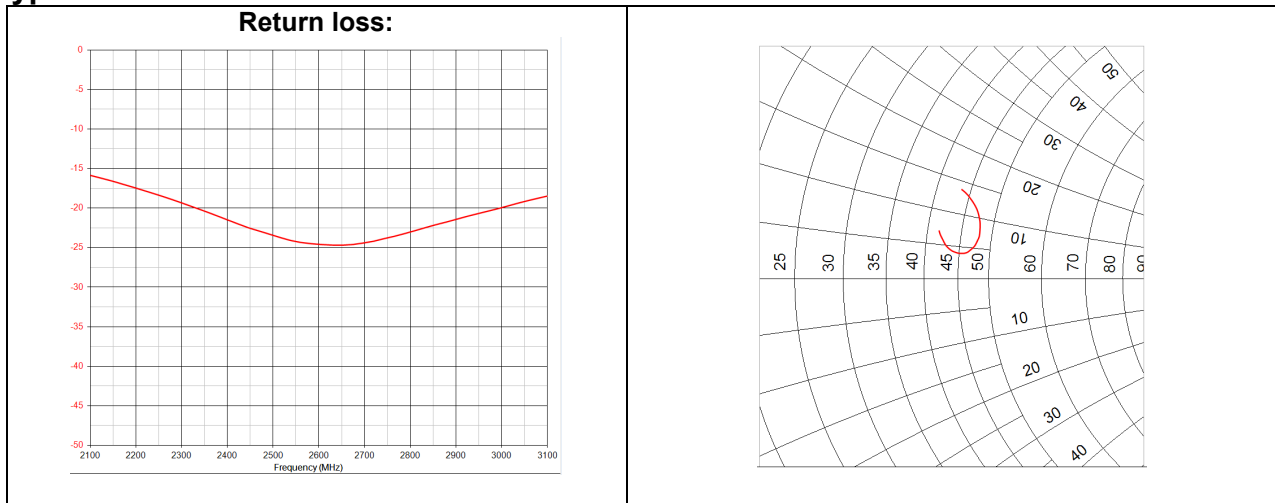


Power De-rating:

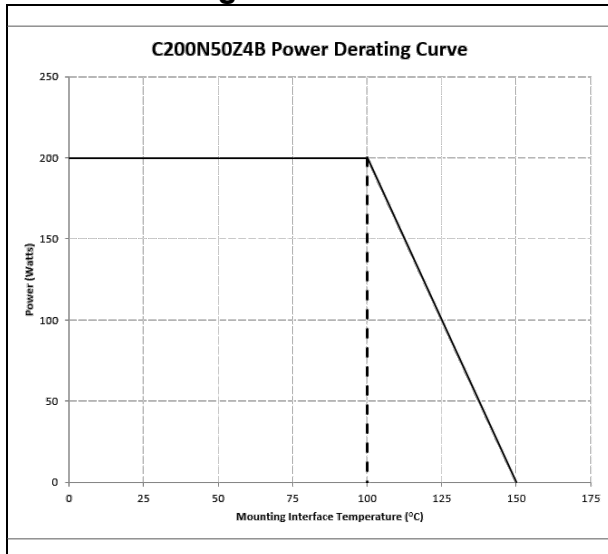

Mounting Footprint:

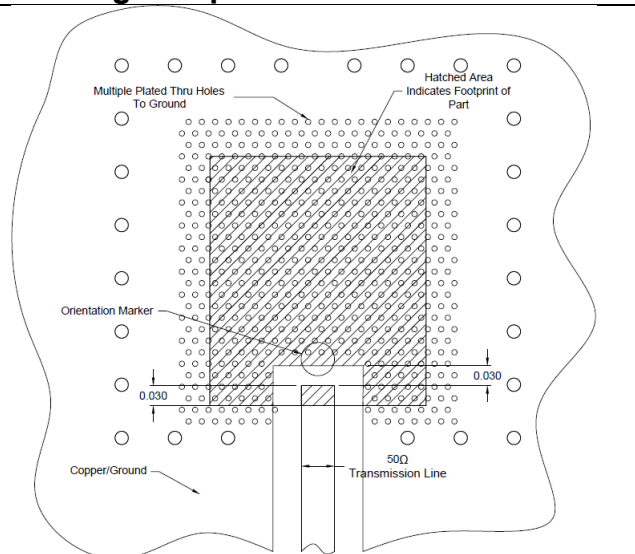

Tape & Reel:

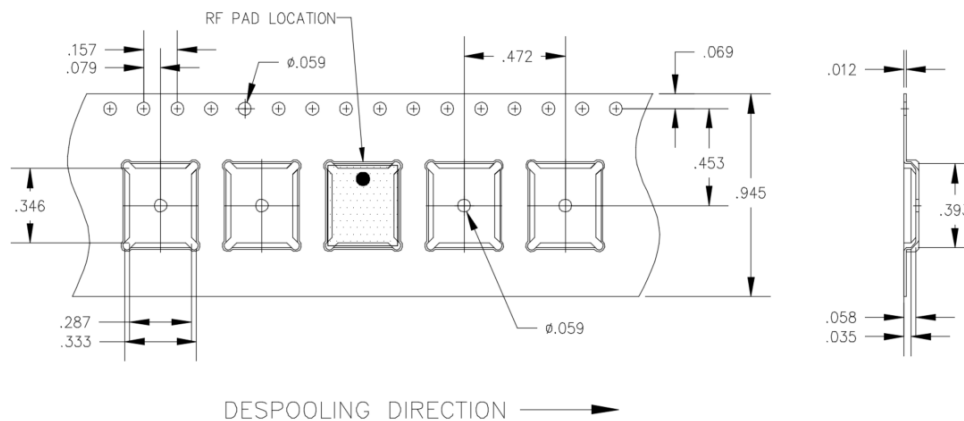

Contact us:

rf&s_support@ttm.com

WWW.TTM.COM

FOLLOW US
f in
#TTM #TTMTECH #INSPIRINGINNOVATION

Inspiring Innovation