


Flange Mount Termination 150 Watts, 50Ω



Features:

- RoHS Complaint
- 150 Watts
- DC – 3.0 GHz
- AlN Ceramic
- Non-Nichrome
Resistive Element
- Low VSWR

Description:

The G150N50W4E is high performance Aluminum Nitride (AlN) flange mount termination intended as a cost competitive alternative to Beryllium

Oxide (BeO). The termination is well suited to all cellular frequency bands

such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for terminating circulators and for use in power combiners. The termination is also RoHS compliant!

General Specifications:


| | |
|------------------------------|------------------------------------|
| Resistive Element | Thick Film |
| Substrate | AlN Ceramic |
| Mounting Flange | Nickel Plated Copper |
| Operating Temperature | -50 to +150°C(see de rating chart) |

Electrical Specifications:

| | |
|--------------------------|--|
| Resistance Value: | 50 Ohms, $\pm 2\%$ |
| Power: | 150 Watts |
| Frequency Range: | DC – 3.0 GHz |
| Return Loss | 25dB DC – 2.0 GHz 20dB DC – 3.0 GHz |

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**

Outline Drawing:


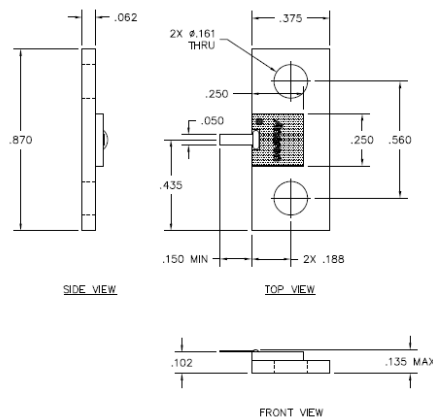


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES


Tolerance is ± 0.010 ", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. **All dimensions in inches.**

Typical Performance:

Return loss:

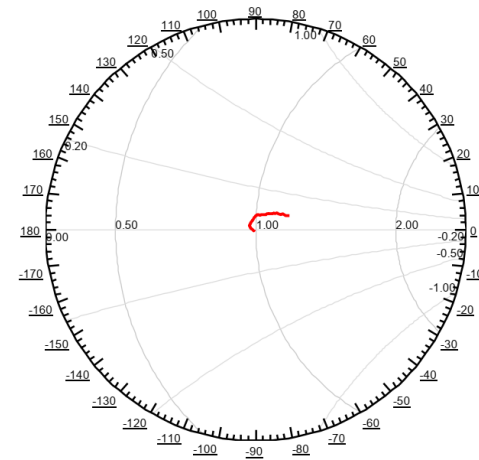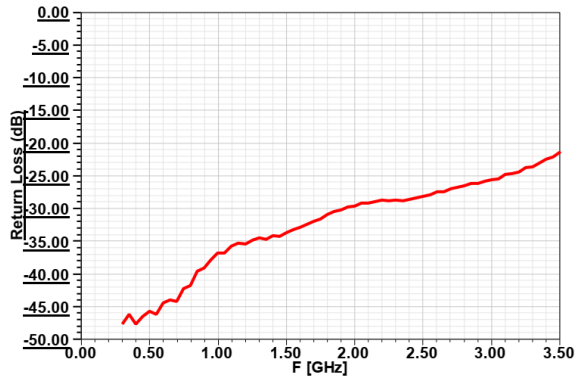


Power de-rating:

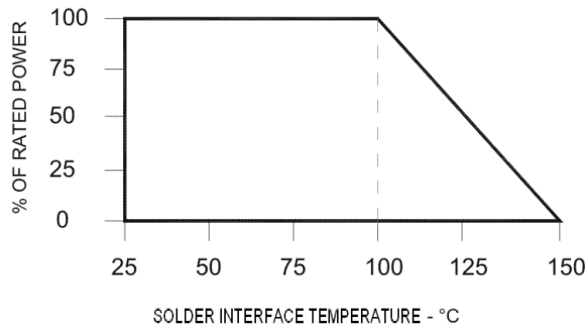

*Actual performance could be limited by the solder properties of the application

Mounting Footprint:

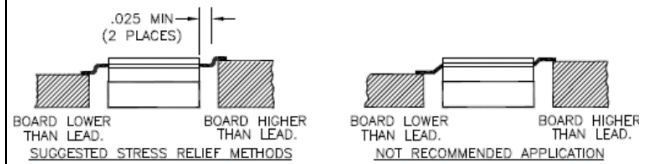

SUGGESTED MOUNTING PROCEDURES:

1. MAKE SURE THAT THE DEVICES ARE MOUNTED ON FLAT SURFACES (.001" UNDER THE DEVICE) TO OPTIMIZE THE HEAT TRANSFER.
2. DRILL & TAP THE HEATSINK FOR THE APPROPRIATE THREAD SIZE TO BE USED.
3. COAT HEATSINK WITH A MINIMUM AMOUNT OF HIGH QUALITY SILICONE GREASE (.001" MAX. THICKNESS).
4. POSITION DEVICE ON MOUNTING SURFACE & SECURE USING SOCKET HEAD SCREWS, FLAT & SPLIT WASHER. TORQUE SCREWS TO THE APPROPRIATE VALUE. MAKE SURE THAT THE DEVICE IS FLAT AGAINST THE HEATSINK. (CARE SHOULD BE TAKEN TO AVOID UPWARD PRESSURE OF THE LEADS TOWARDS THE LID).
5. SOLDER LEADS IN PLACE USING LEAD FREE TYPE SOLDER WITH A CONTROLLED TEMPERATURE IRON